

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Россия (495)268-04-70

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Казахстан (772)734-952-31

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

<https://inficon.nt-rt.ru> || inb@nt-rt.ru

Дисплей манометра Pirani PGD500



The INFICON Pirani Gauge Display PGD500 in combination with the INFICON Pirani Standard Gauge PSG5xx provides a cost effective pressure monitoring solution.

Although it is called Pirani Gauge Display the PGD500 also supports our PCG55x and MPG series vacuum gauges.

ADVANTAGES

- User selectable measurement unit (Pa, mbar or Torr)
- Compact bench top model design can be easily mounted in a panel or 19" rack
- 0 to 10 V output signal from the gauge is available for use in PLC or with a chart recorder
- One free adjustable set point
- CE certified

ORDER INFORMATION

Type

PGD500 Pirani Gauge Display

PGD500

398-802

SPECIFICATIONS

Type		PGD500
Measurement channels		1 (PSG5xx, PCG5xx or MPG series)
Display		LCD
Range	Pa	$5 \times 10^{-7} \dots 1.5 \times 10^5$
Range	mbar	$5 \times 10^{-9} \dots 1500$
Range	Torr	$3.75 \times 10^{-9} \dots 1125$
Measurement rate	1/s	30
Measurement unit (selectable)		Pa, mbar, Torr
Setpoint		
Setpoint relay		1
Adjustment range (depending on gauge)		$1 \times 10^{-8} \dots 500$
Hysteresis		$\geq 10\%$ of measurement value
Relay contact		floating changeover contact
Connector		D-Sub, 9-pole, male
Setpoint		
Contact rating	V (ac)	50
Setpoint		
Contact rating	A (ac)	5
Analog output	V	0 ... 10.3, sensor output signal
Power		
Supply	V (ac)	100 ... 240
Power		
Frequency	Hz	50 ... 60
Power		
Consumption	VA	≤ 30
Temperature		
Operation (ambiance)	°C	+5 ... +50
Storage	°C	-20 ... 60
Relative humidity		$\leq 80\%$ up to +31 °C, decreasing to 50% at +40 °C
Degree of protection		IP20
Weight	kg	0.85


ACCESSORIES

	PGD500
Cable 1.3m/4.3ft, a, FCC_FCC, Cont	398-498
Centering ring with filter DN 16 KF	211-090
Rack mount front-Adapter 2HE/ 3HE	398-499

DIMENSIONS

DIMENSIONS

[mm]

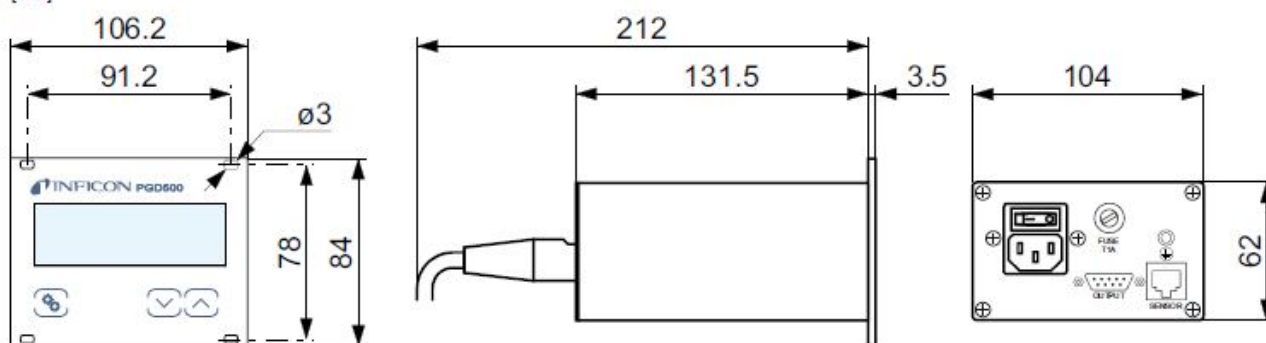

Архангельск (8182)63-90-72
 Астана (7172)727-132
 Астрахань (8512)99-46-04
 Барнаул (3852)73-04-60
 Белгород (4722)40-23-64
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89
 Иваново (4932)77-34-06

Ижевск (3412)26-03-58
 Иркутск (395)279-98-46
 Казань (843)206-01-48
 Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курск (4712)77-13-04
 Липецк (4742)52-20-81
 Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41
 Нижний Новгород (831)429-08-12
 Новокузнецк (3843)20-46-81
 Новосибирск (383)227-86-73
 Омск (3812)21-46-40
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16
 Россия (495)268-04-70

Пермь (342)205-81-47
 Ростов-на-Дону (863)308-18-15
 Рязань (4912)46-61-64
 Самара (846)206-03-16
 Санкт-Петербург (812)309-46-40
 Саратов (845)249-38-78
 Севастополь (8692)22-31-93
 Симферополь (3652)67-13-56
 Смоленск (4812)29-41-54
 Сочи (862)225-72-31
 Ставрополь (8652)20-65-13
 Казахстан (772)734-952-31

Сургут (3462)77-98-35
 Тверь (4822)63-31-35
 Томск (3822)98-41-53
 Тула (4872)74-02-29
 Тюмень (3452)66-21-18
 Ульяновск (8422)24-23-59
 Уфа (347)229-48-12
 Хабаровск (4212)92-98-04
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Ярославль (4852)69-52-93